

# SS-GTR33/GTR55/GTR77/ GTR88/RSR77/RSR88 SS-GTR77P

## SERVICE MANUAL

Ver. 1.2 2011. 10

*E Model*  
*Australian Model*  
SS-GTR88/RSR88



SS-GTR33



SS-GTR55/GTR77/GTR88



SS-RSR77/RSR88

- **SS-GTR33** is the front speaker in MHC-GTR33
- **SS-GTR55** is the front speaker in MHC-GTR55
- **SS-GTR77** is the front speaker in MHC-GTR77
- **SS-GTR88** is the front speaker in MHC-GTR88
- **SS-RSR77** is the satellite speaker in MHC-GTR77
- **SS-RSR88** is the satellite speaker in MHC-GTR88
- **SS-GTR77P** is the package speakers of front and satellite speakers in MHC-GTR77

### • JIG

When disassembling the set, use the following jig (for front panel removal).

Part No.: J-2501-238-A JIG FOR SPEAKER REMOVAL



## SPECIFICATIONS

### Speakers

#### For MHC-GTR33

##### Front speaker (SS-GTR33)

Speaker system  
2-way, 2-driver, Bass reflex  
Speaker unit  
Woofer: 160 mm, cone type  
Tweeter: 40 mm, cone type  
Rated impedance  
6 ohms  
Dimensions (w/h/d)  
Approx. 237 mm × 361 mm × 210 mm  
Mass  
Approx. 3.0 kg net per speaker

#### For MHC-GTR55

##### Front speaker (SS-GTR55)

Speaker system  
2-way, 2-driver, Bass reflex  
Speaker unit  
Woofer: 200 mm, cone type  
Tweeter: 40 mm, cone type  
Rated impedance  
6 ohms  
Dimensions (w/h/d)  
Approx. 250 mm × 395 mm × 290 mm  
Mass  
Approx. 5.1 kg net per speaker

#### For MHC-GTR77

##### Front speaker (SS-GTR77)

Speaker system  
2-way, 2-driver, Bass reflex  
Speaker unit  
Woofer: 200 mm, cone type  
Tweeter: 40 mm, cone type  
Rated impedance  
8 ohms  
Dimensions (w/h/d)  
Approx. 250 mm × 395 mm × 330 mm  
Mass  
Approx. 6.3 kg net per speaker

##### Satellite speaker (SS-RSR77)

Speaker system  
2-way, 2-driver, Bass reflex  
Speaker unit  
Woofer: 100 mm, cone type  
Tweeter: 40 mm, cone type  
Rated impedance  
24 ohms  
Dimensions (w/h/d)  
Approx. 175 mm × 395 mm × 230 mm  
Mass  
Approx. 2.7 kg net per speaker

#### For MHC-GTR88

##### Front speaker (SS-GTR88)

Speaker system  
2-way, 2-driver, Bass reflex  
Speaker unit  
Woofer: 200 mm, cone type  
Tweeter: 25 mm, horn type  
Rated impedance  
8 ohms  
Dimensions (w/h/d)  
Approx. 250 mm × 395 mm × 330 mm  
Mass  
Approx. 6.0 kg net per speaker

#### Satellite speaker (SS-RSR88)

Speaker system  
2-way, 2-driver, Bass reflex  
Speaker unit  
Woofer: 100 mm, cone type  
Tweeter: 40 mm, cone type  
Rated impedance  
24 ohms  
Dimensions (w/h/d)  
Approx. 175 mm × 395 mm × 230 mm  
Mass  
Approx. 2.7 kg net per speaker

Design and specifications are subject to change without notice.

## SPEAKER SYSTEM

9-890-542-03

2011J08-1

© 2011.10

Sony Corporation

Published by Sony EMCS (Malaysia) PG Tec

# SONY®

# SS-GTR33/GTR55/GTR77/GTR88/RSR77/RSR88


## SECTION 1 EXPLODED VIEWS

### NOTE:


- -XX, -X mean standardized parts, so they may have some differences from the original one.
- Items marked "\*" are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.

- Abbreviation
  - AR : Argentina model
  - AUS : Australian model
  - E2 : 120V AC area in E model
  - E4 : African model
  - E51 : Chilean and Peruvian models
  - MX : Mexican model

### 1-1. SS-GTR33

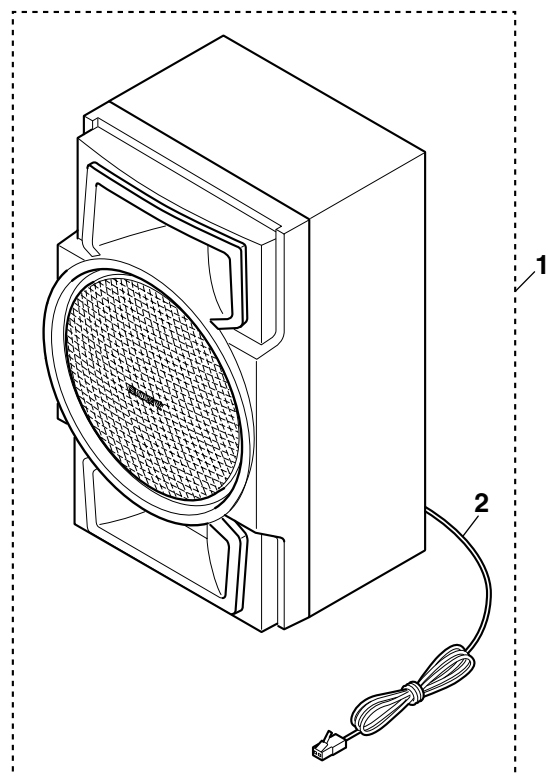

## 1-2. SS-GTR55/GTR77/GTR88

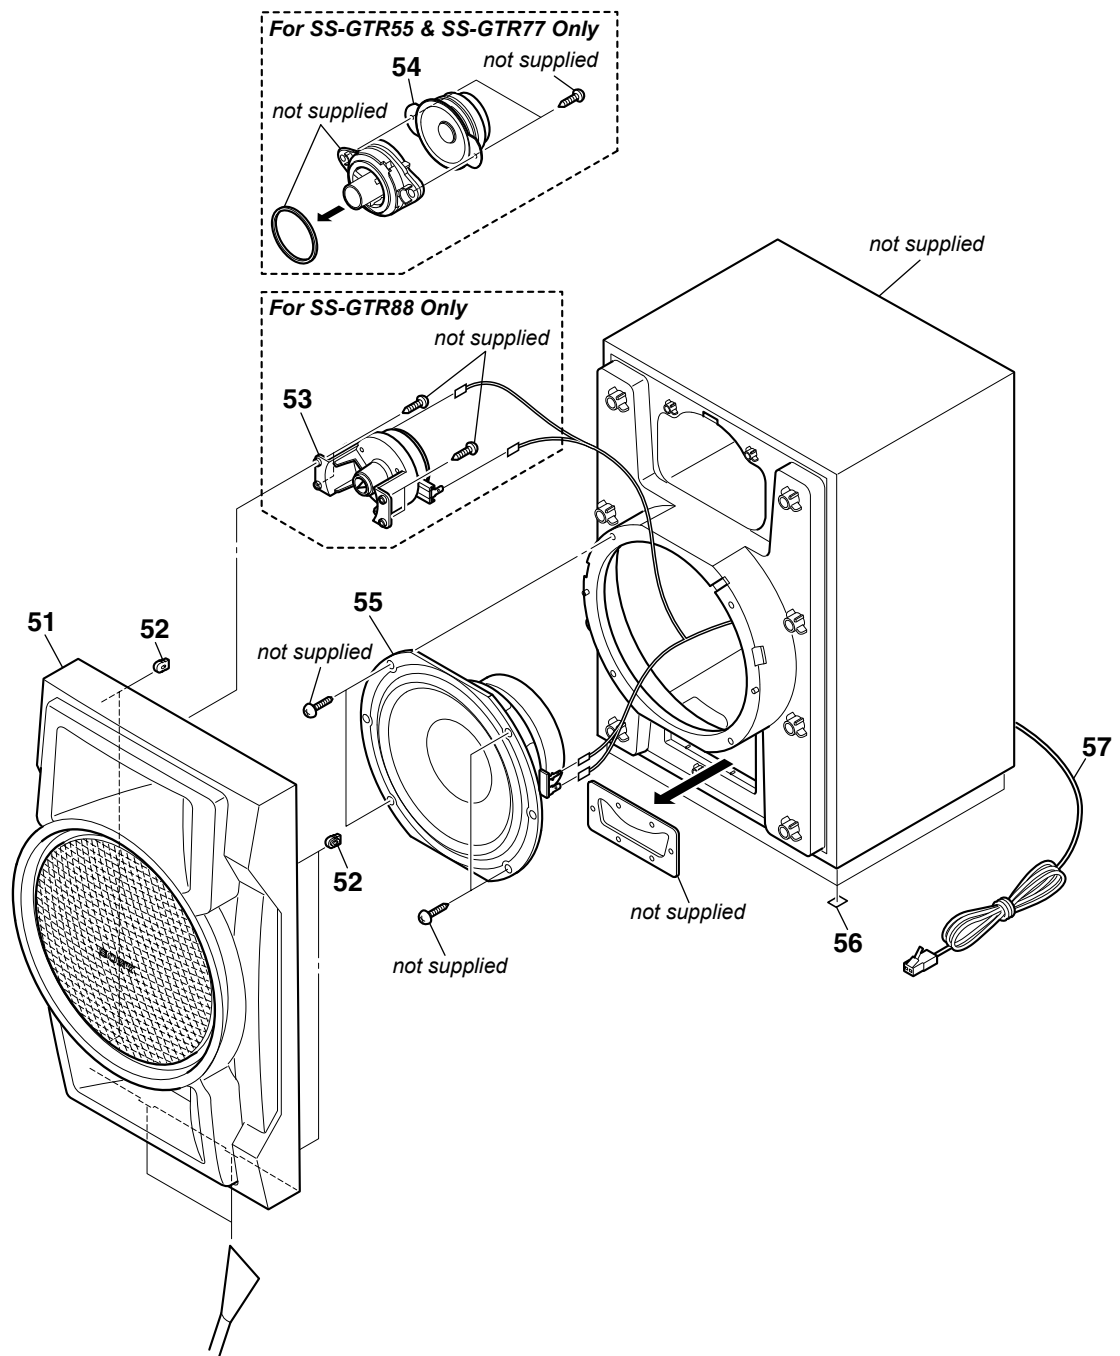

## SS-GTR33/GTR55/GTR77/GTR88/RSR77/RSR88

### 1-3. SS-RSR77/RSR88

