

SECTION 7

EXPLODED VIEWS

Note:

- The mechanical parts with no reference number in the exploded views are not supplied.
- Items marked "*" are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.
- XX and -X mean standardized parts, so they may have some difference from the original one.
- Accessories are given in the last of this parts list.

• Abbreviation

AR	: Argentina model
AUS	: Australian model
E2	: 120 V AC area in E model
E4	: African model
E12	: 220-240 V AC area in E model
E51	: Chilean and Peruvian models
EA	: Saudi Arabia model
MX	: Mexican model
MY	: Malaysia model
RU	: Russian model
SAF	: South African model
TH	: Thai model

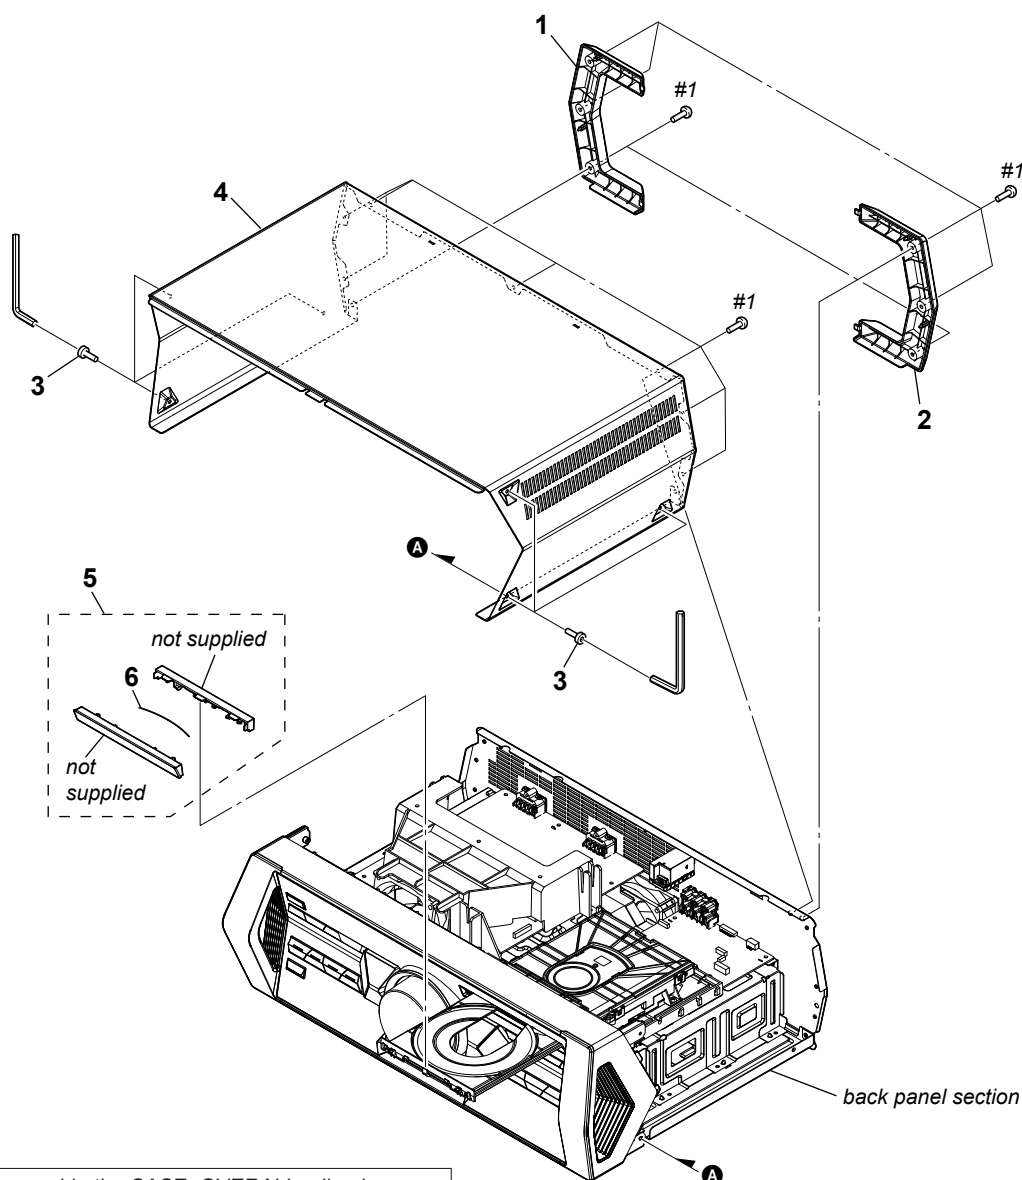
The components identified by mark $\triangle$ or dotted line with mark $\triangle$ are critical for safety.
Replace only with part number specified.

Les composants identifiés par une marque $\triangle$ sont critiques pour la sécurité.
Ne les remplacer que par une pièce portant le numéro spécifié.

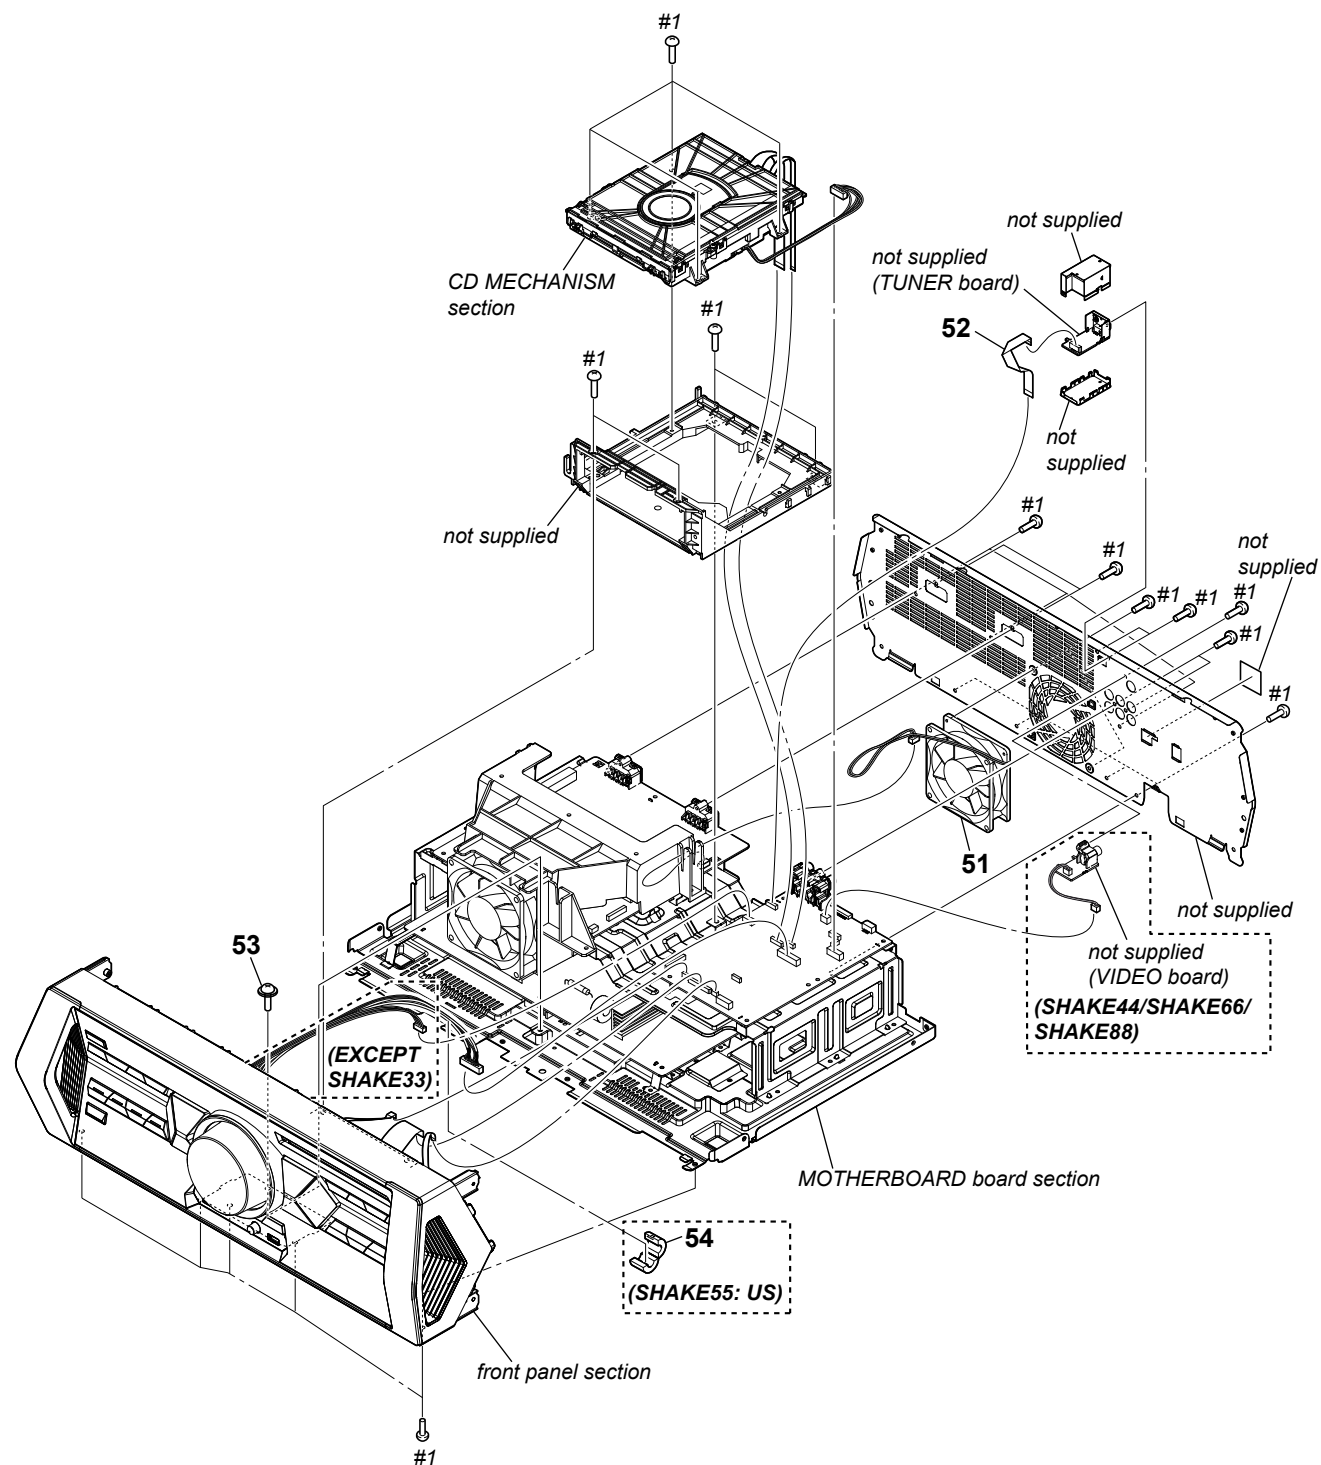
The components identified by mark $\triangle$ contain confidential information.
Strictly follow the instructions whenever the components are repaired and/or replaced.

Les composants identifiés par la marque $\triangle$ contiennent des informations confidentielles.

Suivre scrupuleusement les instructions chaque fois qu'un composant est remplacé et / ou réparé.

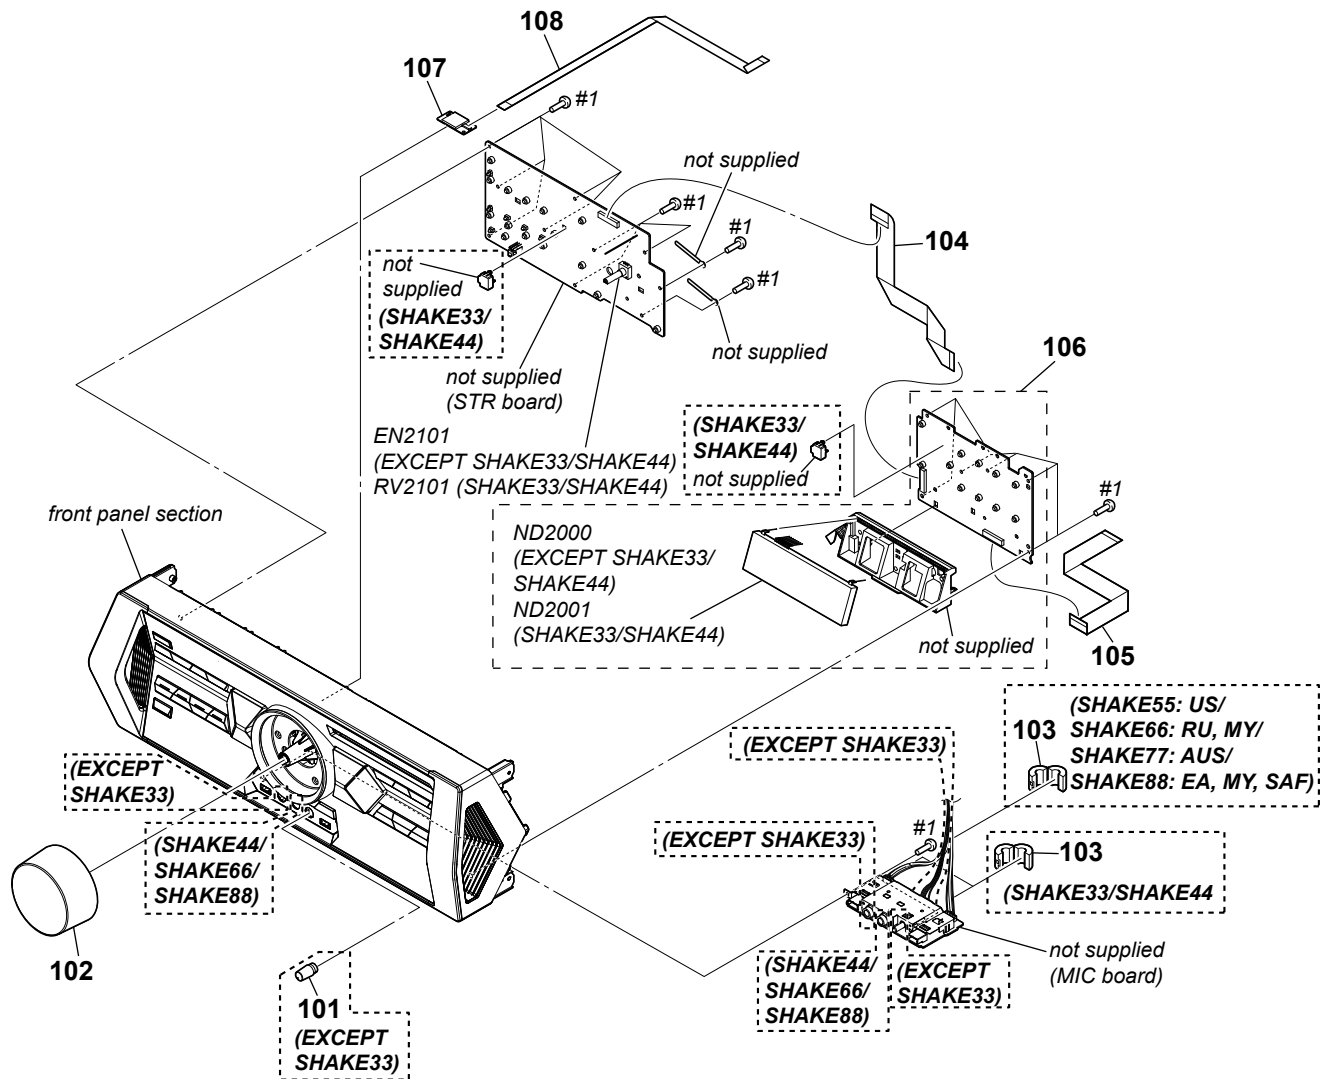
7-1. OVERALL CASE SECTION

Note: To disassemble the CASE, OVERALL, allen key is required to unscrew the SCREW, TAPPING (HEX).

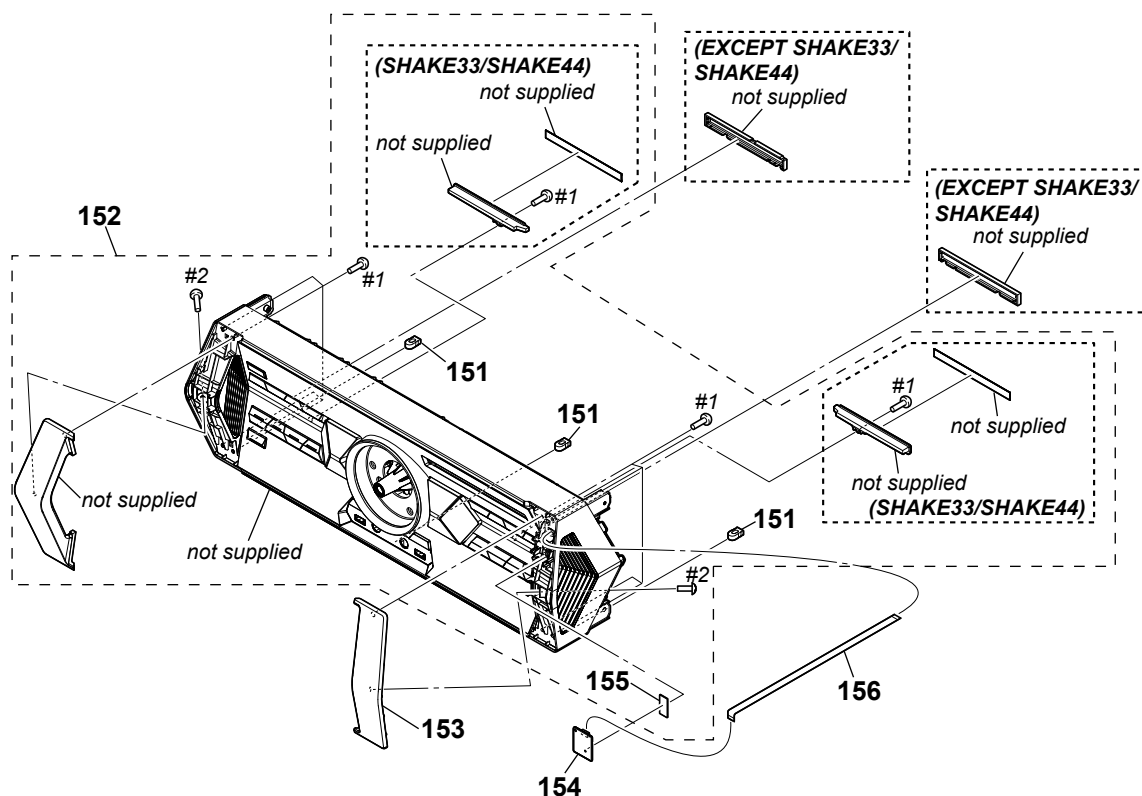


Note: If wire (flat type) is replaced, install it after bending it in the same form as that before replacement.

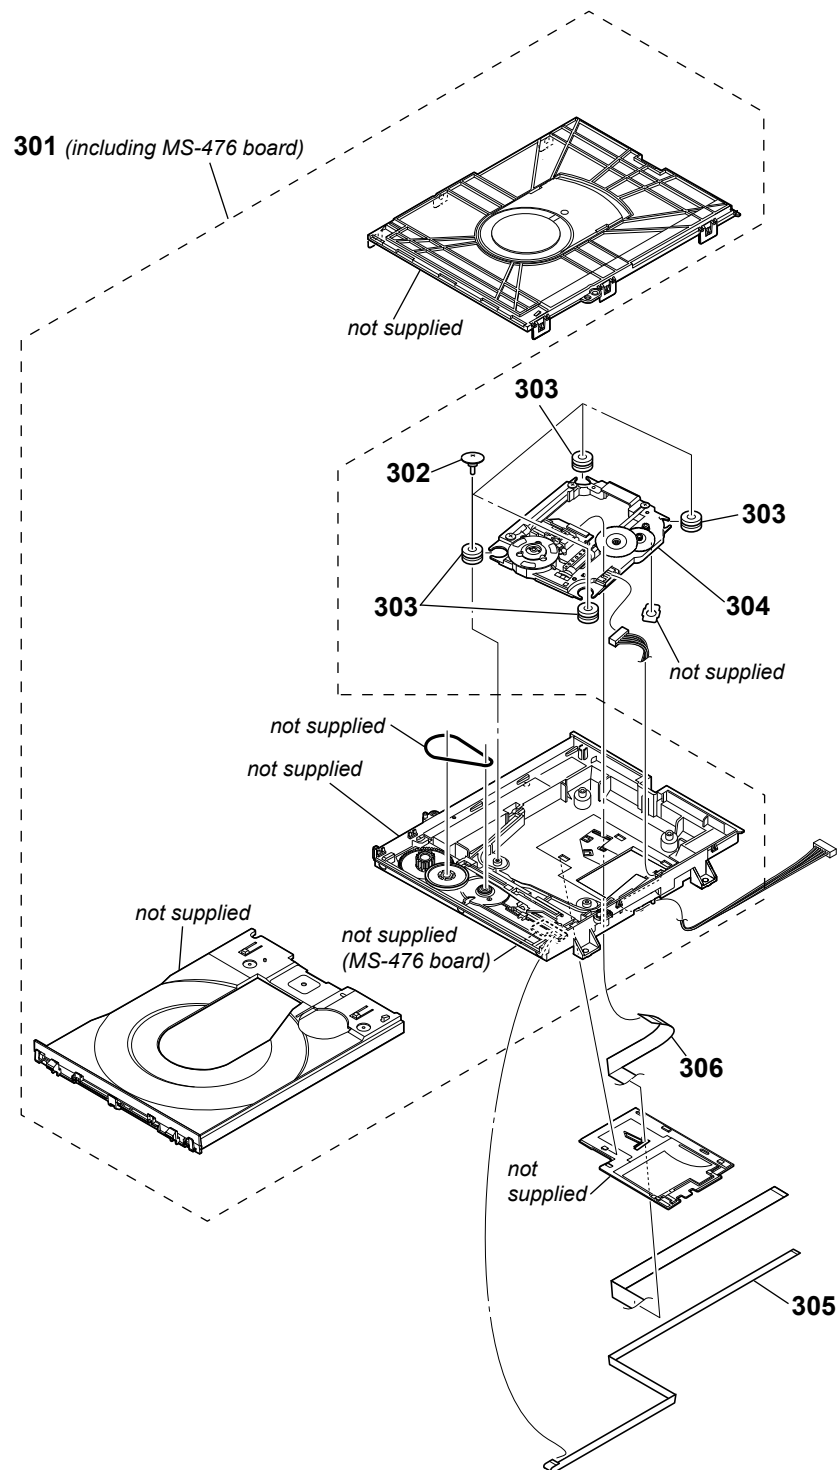
7-3. FL BOARD, STR BOARD



Note: If wire (flat type) is replaced, install it after bending it in the same form as that before replacement.

7-4. FRONT PANEL SECTION

Note: If wire (flat type) is replaced, install it after bending it in the same form as that before replacement.

**7-7. CD MECHANISM SECTION
(CDM90-DVBU202//M)**

Note: If wire (flat type) is replaced, install it after bending it in the same form as that before replacement.